5.0 PROCEDURES TO PREVENT HAZARDS

[R315-264-30 through 37 of the Utah Admin. Code]

The Bacchus Facility is a collection of hazardous waste management units that are all operated by ATK Launch System, Inc. The Bacchus Facility consists of the contiguous Plant 1, Bacchus West and NIROP facilities. The Plant 1 regulated unit is HS-1. NIROP regulated units include: ES-2, ES-3, NIROP Burning Grounds and Ash Storage Pad. All of these units are designed, constructed, maintained, and operated to minimize the possibility of fire, explosion, or the release of hazardous waste or hazardous waste constituents into the air, soil, or surface water that could threaten human health or the environment. This plan covers the safe handling procedures employed at the waste management units at both the Plant 1 and NIROP facilities.

5.1 SECURITY

5.1.1 Security Procedures and Equipment

Bacchus provides 24-hour security of the Bacchus Facility through the use of fences, by limiting access at entrance gates, having armed security force that patrols the Bacchus Facility, and by staffing a private fire department. The NIROP Facility is located within the Bacchus Facility boundary fence.

5.1.2 Surveillance System

Entrance into the Bacchus Facility is controlled by security guards that are stationed at the main entrance gates and under the direct supervision of the facility's Security Department or through the use of Bacchus issued identification card that allows access through card-operated gates equipped with digital surveillance cameras.

Access to the Bacchus Facility is limited to authorized personnel who have a valid Bacchus Facility identification badge on their person that is clearly displayed. Features of the security and surveillance system include:

- All Bacchus Facility employees are issued an identification badge;
- All visitors to the Bacchus Facility are required to obtain visitor passes, a temporary identification badge from the facility's Security Department;
- Escorted visitors will be accompanied by a Bacchus facility employee while they are onsite;
- Unescorted visitors, e.g., contractors, must successfully complete the Bacchus Facility's Security and Safety training before they can enter the Bacchus Facility alone;
- All employees and visitors on the Bacchus Facility are required to always clearly display their Bacchus Facility identification badge while on the site;
- All visitors entering the Bacchus Facility will go through one of the access gates;
- Contractor and commercial vehicles may enter contractor gates after proper clearance has been secured; and
- All gates to the site are closed and locked during non-operating hours.

5.1.3 Barriers and Means to Control Entry

An eight foot tall perimeter security fence surrounds the entire Bacchus Facility with access available only through controlled gates. The perimeter fence is monitored daily by armed security personnel. Repairs to the fence are made when they are identified. The location of the boundary fence and gates are shown on Figure 5-1.1.

Hazardous Waste Management Facility Barriers

All of the hazardous waste management facilities are located inside the secured perimeter for the Bacchus Facility.

NIROP waste management units - the ES-2and ES-3 buildings are locked when unoccupied. Ash Storage Pad is an open air storage pad that is immediately adjacent to the NIROP Burning Grounds and has no secondary fencing. The NIROP Burning Grounds is a fenced compound that is located inside the perimeter fence for the Bacchus Facility. The fence surrounding the NIROP Burning Grounds is kept locked when the unit is unoccupied.

Plant 1 waste management unit - The HS-1 facility is composed of a number of storage buildings that are located inside the perimeter fence for the Bacchus facility. This unit has no secondary fencing, but the doors to the liquid storage areas are locked at the end of each working day.

5.1.4 Warning Signs

Warning signs are posted at approximate 500-ft intervals, at fence corners, and at each gate along the fence. In addition each hazardous waste storage and treatment unit is posted with a sign that reads "Danger, Unauthorized Personnel Keep Out" or similar wording. The signs are written in English and are legible at a distance of at least 25 feet. The signs are posted at each entrance and at normal approach routes to the active portion of each hazardous waste management unit.

5.2 SITE FACILITY INSPECTIONS

5.2.1 General Inspection Requirements

Routine inspections are conducted at all hazardous waste management units located at the Bacchus facility. The inspections are designed to detect equipment deterioration and malfunctions, operator errors, and accidental leaks or spills that could lead to the release of hazardous waste or hazardous waste constituents to the environment and/or threaten human health.

The inspection forms for the hazardous waste management units are presented in Figures 4-6.12 and 4-6.17 of the NIROP permit and Figures 5-2.2, 5-2.3, 5-2.4 and 5-2-5 of this attachment. The common non-emergency problems that may be encountered during an inspection are listed on the inspection forms. All inspectors will be trained in what constitutes acceptable and unacceptable conditions for both emergency and non-emergency situations. A log of this training is maintained in the Bacchus Facility's employee training record. The inspector is required to check each item on the form and indicate whether its condition is acceptable or unacceptable. If the status of a particular item is unacceptable, the inspector will detail the problem and describe what type of corrective action will be taken to correct the problem. This information is recorded on the applicable inspection form.

ATK Launch Systems Bacchus – Plant 1 UTD001705029

All non-emergency items will be corrected within 90 days of the date of discovery. A non-emergency item is anything that does not have the potential to escalate into an imminent endangerment to human health or the environment, create hazards to Bacchus Facility personnel or visitors, or would not evolve into a situation that would immediately affect Bacchus Facility production or waste handling activities. All corrective action activities will be identified on the inspection record. The date the problem is corrected will also be documented. Problems requiring an extended period to correct may be addressed using a temporary work around solution until a permanent solution can be implemented as long as the temporary solution does not present a risk to human health or the environment.

All temporary solutions will be documented on the inspection form in the operating record. Whenever a temporary solution is implemented, Bacchus will provide justification upon request to any authorized representative of the Director detailing the need for the temporary solution and explaining why the non-emergency item could not be corrected within 90 days. If Bacchus cannot correct the problem that required a temporary solution within 180 days of the date of discovery of the problem, then Bacchus will submit a request to modify the permit so that the problem can be corrected.

An emergency situation is defined as any situation that could escalate into imminent endangerment to human health or the environment, create hazards to Bacchus Facility personnel or visitors, or involve situations that could affect the Bacchus Facility's production or waste management activities. Emergency situations include, but are not limited to the following: (1) spill or leak of a reportable quantity any hazardous waste, material or substance; (2) incompatible storage of wastes, materials or substances; (3) storage of wastes, materials or substances in unlabeled or unknown containers; and (4) storage containers in poor condition (e.g. the container cannot be closed properly or has damage that may compromise the integrity of the container) The inspectors will clearly document and detail all emergency situations discovered during an inspection. All emergency situations will be corrected, contained or stabilized within 72 hours from the time of discovery. All operations at a facility with an emergency situation will be halted until the emergency situation is resolved.

In the event that an emergency involves the release of hazardous waste or hazardous waste or hazardous waste constituents to the environment, efforts will be directed towards containing, removing, and cleaning up or decontaminating the affected area. Chapter 6 of this permit application, the Hazardous Waste Contingency Plan, details the processes for reporting and managing corrective action of a release to the environment.

All inspection records will be maintained for a minimum period of 3 years from the date of the inspection. Each inspection record will identify the name of the inspector, and the date and time the inspection was performed.

5.2.2 Inspection Criteria

The inspector checks the status and condition of each item and records the finding. If the condition of a particular item is unacceptable, the inspection will record appropriate and complete information on the issue, including the date of discovery, the nature of the repair needed, and date when corrective action took place. When deterioration or malfunctions of facility equipment, errors, or accidental leaks and spills are noted, the inspector takes prompt action to correct the problem. If the inspector is unable to correct the problem immediately, the facility supervisor will be informed. If the problem cannot be corrected within 24 hours,

the facility supervisor will notify Bacchus Facility Environmental Services. All corrective actions or repairs are recorded on the appropriate inspection record form.

The following tables identify inspection items and criteria for each hazardous waste management unit identified in this permit application.

	Table 5.1					
Burning Grounds Pre-burn Inspection						
(see Figure 4-6.12 of the NIROP Permit)						
Inspection Items	Inspection Criteria					
Radio	Verify the radio works properly					
Telephone	Verify the telephone works properly.					
Fire Extinguisher	Verify that at least one (1) fire extinguisher is present, and access is not blocked. If the extinguisher has a pressure gage, verify it is in the normal range; if not, verify the plastic seal is in place.					
Fire Blankets	Verify the fire blankets are in the designated locations.					
Diesel Storage	Verify the condition of the container – no signs of leaks.					
Siren & Flashing Light	Verify the siren and flashing light is operational.					
Warning Sign	Verify that warning sign is intact and in good repair.					
Unburned Slums	Check previous Post Burn Inspection for location of unburned slums and residue					
Ejected Material	Visually inspect the area around the pans burned on previous date for unburned material. Collect any unburned material.					
Pan Water Leakage	Visually inspect the pan for leaking pan water.					
Pan Water Level	Visually inspect the pan for water on the pan surface. Pump the pan if water is observed.					
Residue Cleaning	Visually inspect the pans burned previously for residue. Collect and dispose of any residue if present.					
Resistance Check	Acceptable value is an open circuit (no short circuit)					

Table 5.2						
Burning Grounds Post Burn Inspection						
(see Figure 4-6.17 of the NIROP Permit)						
Inspection Item Inspection Criteria						
Radio Verify the radio works properly.						
Telephone Verify the telephone works properly.						
Fire Extinguisher Verify that at least one (1) fire extinguisher is present.						
and access is not blocked. If the extinguisher has a						
pressure gage, verify it is in the normal range; if not,						
	verify the plastic seal is in place.					

Table 5.2 continued

Inspection Item	Inspection Criteria
Fire Blankets	Verify the fire blankets are in the designated locations.
Diesel Storage	Verify the condition of the container – no signs of leaks.
Open Flame or Hot	Verify that no open flame or hot spots are present from
Spots	previous burn.
Pan and Cage Cleaning	Clean pan and cage surface according to procedure.
Unburned Residue	Unburned residue collected on pans, cage or separate
Collected	container if present.
Ejected Material	Visually inspect the area around the pans burned on
	previous date for unburned material. Collect any
	unburned material and place it on the pan or cage.
Asphalt surface around	Asphalt surface around pans and cage swept to collect
pans and cage	ash, weather permitting
Ash Storage	Containerize ash and burned residue according to
	procedure.
Ash Storage	Verify the ash storage pad is clean of ash. Sweep and or
Housekeeping	collect any material; weather permitting.
Unburned Waste	Cover unburned waste if not burned by 6 PM on the
	calendar day following the burn, temperature permitting

Table 5.3					
Monthly Burning Grounds Perimeter Inspection Record					
(see Figure 5-2.2)					
Inspection Items	Inspection Criteria				
Description and location of explosive	Identify by type and location any explosive				
material found around NIROP	or explosive contaminated materials visible				
Burning Grounds perimeter	on the South, West, and North areas				
	outside the perimeter fence.				
Disposition of explosive material	Identify handling, storage, and disposal				
found around NIROP Burning	methods for any material identified during				
Grounds perimeter	the inspection				
Catch basins for NIROP Burning	Assure catch basins are clear of debris				
Grounds storm water collection	including catch basin by Cage 19 and catch				
	basin by Pan 8.				

Table 5.4					
HS-1, ES-2, ES-3, and BG Ash Storage Pad					
	Daily Inspection Criteria				
(see Figure 5-2.4)					
Inspection	Inspection Criteria				
Items					
Containers	Inspect containers for leaks and spills.				

	Table 5.5				
ES-2 and ES-3					
Weekly Inspection Criteria					
	(see Figure 5-2.3)				
Inspection	Inspection Criteria				
Items					
Telephone	Verify the telephone works properly.				
Danger sign	Verify the danger sign posted on the main entrance is visible.				
Building	Verify the doors are locked.				
security					
Fire	Verify that at least one (1) fire extinguisher is present, and access is				
extinguisher	not blocked. If the extinguisher has a pressure gauge, verify it is in				
	the normal range; if not verify the plastic seal is in place.				
Aisle space	Verify a 30-inch minimum aisle space is maintained.				
Container	Verify all containers are marked with a tracking number and or				
labeling	labels are clearly visible				
Storage	Verify 1.1 and 1.3 materials are separated by a 30-inch minimum				
Compatibility	aisle space.				
Containers	Visually inspect all containers in storage to ensure all containers are				
	closed, in good condition and that no containers are leaking.				

Table 5.6						
	Ash Storage Pad Weekly Inspection Criteria					
	(see Figure 5-2.3)					
Inspection	Inspection Criteria					
Items						
Danger sign	Verify the danger sign posted on the main entrance is visible.					
Aisle space	Verify a 30-inch minimum aisle space is provided.					
Container	Verify the container is marked with a tracking number and or the					
labeling	label is clearly visible					
Containers	Visually inspect container(s) to ensure all containers are closed, in					
	good condition and that no containers are leaking If a gondola is					
	in use, assure the gondola is not leaking, is not excessively dented					
	and that the lid is securely in place.					
Pad	Visually inspect the pad for cracks in need of repair.					
Note: The Ash Storage Pad shares a fire extinguisher and danger sign with the						
NIROP Burning Grounds.						

	Table 5.7
	HS-1
	Weekly Hazardous Waste Storage Inspection Criteria
T	(see Figure 5-2.5)
Inspection	Inspection Criteria
Items	V-'C-1-'11'1'-14
Lights	Verify building lights are working properly & provide adequate lighting.
Telephone	Verify the telephone works properly.
Danger sign	Verify the danger sign posted on the main entrance is visible.
Building	Verify the doors function properly (e.g. will close to maintain
security	building temperature and keep animals out).
Fire	Verify three (3) fire extinguishers are present in: (1) Bldg. 8562
extinguisher	chemical transfer room, (2) Bldg. 8567 and (3) Bldg. 8568, and
Cathiguisher	access is not blocked. If the extinguisher has a pressure gauge,
	verify it is in the normal range; if not verify the plastic seal is in
	place.
Emergency	Verify the following items are present and in good condition:
Equipment	Absorbent material (5 bags)
	Barricade tape (1 roll)
	Boots- disposable (10 pair)
	Drum repair int (1 int)
	• Coveralls – disposable (10 each)
	• Face shield (3 each)
	• Goggles (3 pair)
	• Gloves (10 pair)
	Mercury spill kit (1 each)
	 Neutralizing media for acids (1 gallon)
	 Neutralizing media for bases (1 gallon)
	pH paper (1 packet)
	• Shovel non-sparking (1 each)
Container	Verify all containers are marked with a tracking number and/or have
marking	labels clearly visible.
Aisle space	Verify that a 30-inch minimum aisle space is provided for all
	containers. Small containers in cabinets are exempt from this
	requirement.
Chemical	Verify acids, flammables and oxidizers are stored in separate
compatibility	containments and/or cabinets. Verify all other segregation per 49
	CFR 177.848 or 173.12(e) as applicable.
Containers	Visually inspect all containers in storage to ensure no containers are
	leaking. Visually check inside of each small container storage
G	cabinet for signs of spills.
Sump	Visually inspect the sumps for evidence of liquids. If liquid is found
	identify the source, and take corrective action as necessary to
	eliminate the source. Collect and properly containerize any liquids
I	collected.

5.2.3 Frequency of Inspection

Inspections of the Bacchus Facility's equipment are conducted at a frequency sufficient to identify problems before they harm human health or the environment.

ES-2, ES-3, HS-1 and the Ash Storage Pad are inspected every day, using the Hazardous Waste Daily Inspection Record (Figure 5-2.4), when the units are in active use (e.g. when wastes are being loaded or unloaded at the unit). These hazardous waste management units will, at a minimum, be inspected weekly using the Explosive Storage Building/Pad/Treatment Inspection Record (Figure 5-2.3) or the HS-1 Weekly Hazardous Storage Inspection Record (Figure 5-2.5), regardless of activity.

Every burn at the NIROP Burning Grounds will have a pre and post burn inspection. The preburn inspection will be conducted at least monthly if there is an extended period between burns and no pre-burn inspection has been conducted during the calendar month. The perimeter of the NIROP Burning Grounds will be inspected each calendar month. The NIROP Burning Grounds will also be inspected weekly using the Explosive Building/Pad/Treatment Inspection Record (Figure 5-2.3) to document the condition of ordnance (between first and second burns), untreated residue and unburned waste.

5.3 EMERGENCY PREPAREDNESS

5.3.1 Equipment Requirements

All hazardous waste management units and operations are equipped to prevent and minimize the potential impact of a release of hazardous waste or hazardous waste constituents which may be harmful to human health or the environment. The equipment used includes internal and external communication devices, personal protective clothing and equipment, fire fighting equipment, hand tools, spill control equipment, decontamination equipment, and other emergency equipment and materials. Emergency equipment requirements for the hazardous waste management units and the Bacchus Facility are identified and discussed in the Contingency Plan, Attachment 6 of this Permit.

5.3.2 Internal Communication

The hazardous waste management units are linked with the internal telephone system for the Bacchus Facility. All emergencies, including hazardous waste releases or spills, are reported by dialing the plant emergency phone number (extension 2222). If employees are using an external phone line then they would dial 801-251-2222 to report an emergency.

The emergency notification will include the following information:

- Callers name
- Callers location (building number and telephone number)
- Type of emergency (explosion, fire, hazardous waste release, etc.)
- Extent of emergency

Phones are installed at the following locations:

- ES-2 inside the building.
- ES-3 inside the build and/or adjacent building CD6B.
- NIROP Burning Grounds phones on the telephone pole by main gate and in the control bunker.
- Ash Storage Pad shares the phones available to the NIROP Burning Grounds
- HS-1 inside the building

ATK Launch Systems Bacchus – Plant 1 UTD001705029

5.3.4 External Communication

The Bacchus Facility internal telephone system described above can also be used to summon emergency assistance from local law enforcement, fire departments, and state and local emergency response teams. Telephones are available for use at or near each waste management unit as described in 5.3.2. In addition employees responding to spills and/or release of hazardous waste or hazardous waste constituents carry two-way radios or cell phones which may be used to summon emergency assistance.

Bacchus has agreements for fire fighting assistance at the Bacchus Facility with West Valley City and the Unified Fire Authority in the event that the Bacchus Fire Department cannot control a fire. However, due to the nature of manufacturing operations conducted at the Bacchus Facility, it is understood by the outside fire departments that the Bacchus Fire Department will escort, direct, and take charge of the overall fire fighting operation. In addition, the National Fire Protection Association (NFPA) protocol dictates that the first agency on the scene coordinates all fire fighting activities.

A good mutual working arrangement is maintained between the Bacchus Facility Security personnel both the West Valley City Police Department and the Salt Lake County Sheriff's Department. In the event additional law enforcement personnel are required, other outside police departments located within the county may be contacted. Site personnel will escort outside law enforcement personnel at all times while on the site to avoid possible dangers.

Bacchus staffs a clinic at the Bacchus Facility with a nurse who is capable of treating minor injuries. No specific arrangements have been made with any of the area hospitals, because it has not been deemed a necessary requirement due to the nature of the hazardous waste materials managed at the Bacchus Facility. Should it be needed, Pioneer Valley Hospital, located in West Valley City (approximately 9 minutes traveling time from the Bacchus Facility) can provide professional medical support for employees. The Bacchus Facility also has sufficient open space for a helicopter to evacuate injured personnel.

5.3.5 Emergency Equipment

All fire extinguishers on the Bacchus Facility are visually inspected for pressure, functionality and existence by the Bacchus Fire Department quarterly, and by individual building supervisors monthly. Fire extinguishers at the hazardous waste storage units are inspected at least weekly and documented on the weekly inspection form. Fire extinguishers and fire fighting equipment at the NIROP Burning Grounds is inspected prior to every burn and at least monthly if the NIROP Burning Grounds are inactive for an extended period on time. The monthly inspections conducted by building supervisors are documented on a tag attached to the fire extinguisher. Records of quarterly inspections conducted by the Bacchus Fire Department are maintained by the Bacchus Fire Department. The inspections of the hazardous management units are maintained by Bacchus Facility Environment Services.

The emergency communication system for the Bacchus Facility is tested weekly by the Bacchus Fire Department who also documents the test. The communication devices used at the hazardous waste storage units are inspected and tested weekly. The communication devices used at the NIROP Burning Grounds are inspected prior to every burn and at least monthly if the NIROP Burning Grounds are inactive for an extended period on time. The inspections of the hazardous management units are maintained by Bacchus Facility Environment Services.

5.3.6 Water for Fire Control

The location of fire hydrants at the hazardous waste facilities is described below. All fire hydrants are subject to an annual flow check by the Bacchus Fire Department.

Bacchus Facility safety procedures limit fighting fires when explosive materials are involved. The fire fighting activities at any of the hazardous waste storage or treatment facilities will involve containment only, to keep the fire from spreading to other facilities.

Water for fire control/containment is available as follows:

- ES-2 is equipped with a deluge fire suppression system. The fire hydrant/hose combination can deliver 2430 gpm @ 20 psi
- ES-3 is equipped with a deluge fire suppression system. The fire hydrant/hose combination can deliver 2430 gpm @20 psi
- NIROP Burning Grounds the NFPA 13 calculation requires 178 gpm. The fire hydrant/hose combination can deliver 2430 gpm @ 20 psi.
- Ash Storage Pad shares the fire control and containment resources described for the NIROP Burning Grounds.
- HS-1- NFPA 13 water supply requires at least 772 gpm at HS-1. The nearest hydrant (800 yards away) can provide 1081 gpm at a residual pressure of 60 psi at the hydrant, but friction losses from a long hose will lower the actual flow rate. The pressure losses will be made up through the use of two pumper trucks in series should they be needed. The nature of the operations at HS-1 make fighting a fire there unlikely (for Safety reasons), but the hydrant should provide enough water to keep a fire from spreading beyond the facilities boundary.

5.3.7 Protection of Water Supplies

Water supplies are protected by procedures and facilities utilized at the Bacchus Facility. Spills and leaks are promptly cleaned up, potential releases are minimized by our container management practices, the design of the hazardous waste management units, run-on/run-off controls that prevent stormwater from being contaminated, and frequent inspection of all waste and hazardous material storage and handling areas.

5.3.8 Power Failure

Most hazardous waste management operations at the Bacchus Facility are not dependent upon power for continuing operations. In the event of a power failure, operations will stop until power is restored. The loss of heating in explosives waste storage areas could create a hazard where nitroglycerine-containing materials are stored or handled. In the event that heating is lost, the materials will be burned immediately or moved to another heated location.

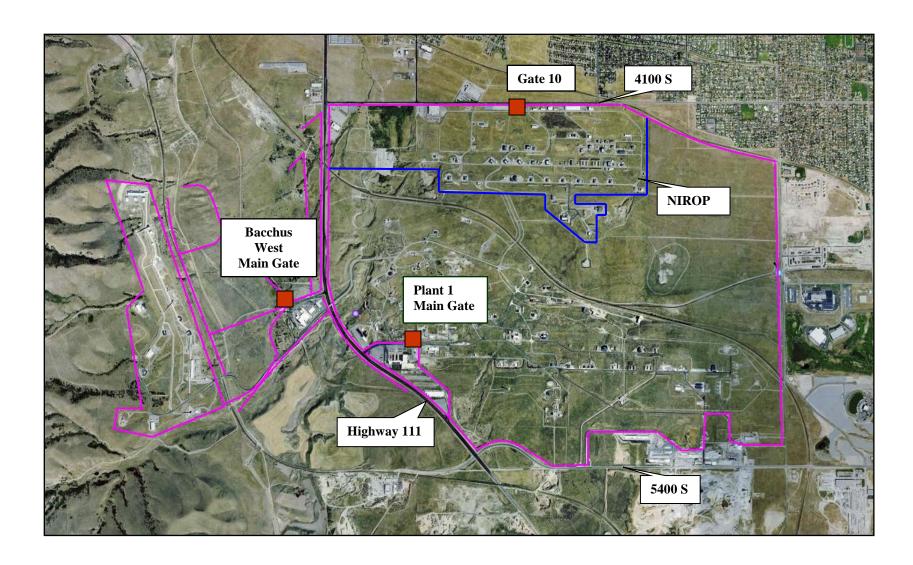


Figure 5-1.1 ATK - Bacchus Security Fence

MONTHLY BURNING GROUNDS PERIMETER INSPECTION RECORD

Inspector:
Date:
Time:
escription and Location of PEP Material Found Around Burning Grounds Perimeter:
isposition of PEP Material Found Around Burning Grounds Perimeter:
ote condition of Storm water catch basins by Pan 8 and Cage 19:
ontact Burning Grounds Supervision if catch basins require cleaning.
ote: Inspection is to be done once each calendar month

Figure 5-2.3

	ES-2 (8A)	ES-3	B.G. Ash	Burning
		(CD6A)	Gondola	Grounds
Time of Inspection				
Telephone dial tone			Share with BG	
Security signs at entrance			Share with BG	
Building secure			N/A	
In position			Share with BG	
•				
Access available			Share with BG	
Aisle space allows for unobstructed				
•				
Incompatible wastes are separated				
				N/A
	·	-		N/A
Accumulation date present		N/A		N/A
Label clearly visible	N/A	N/A		N/A
Pad Inspected for Cracks	N/A	N/A		N/A
Ordnance collected and containerized	N/A	N/A	N/A	
Unburned waste covered	N/A	N/A	N/A	
Untreated residue collected on pan,	N/A	N/A	N/A	
Untreated residue properly labeled	N/A	N/A	N/A	
<u> </u>	,		, ,	
	Telephone dial tone Security signs at entrance Building secure In position Pressure gauge checked Seal in place Access available Aisle space allows for unobstructed movement Waste properly labeled Incompatible wastes are separated Gondola leaks and dents Lid to gondola secure Accumulation date present Label clearly visible Pad Inspected for Cracks Ordnance collected and containerized Unburned waste covered Untreated residue collected on pan, cage or separate container	Telephone dial tone Security signs at entrance Building secure In position Pressure gauge checked Seal in place Access available Aisle space allows for unobstructed movement Waste properly labeled Incompatible wastes are separated Gondola leaks and dents Lid to gondola secure N/A Accumulation date present Label clearly visible Pad Inspected for Cracks N/A Ordnance collected and containerized Unburned waste covered V/A Untreated residue collected on pan, cage or separate container	Time of Inspection Telephone dial tone Security signs at entrance Building secure In position Pressure gauge checked Seal in place Access available Aisle space allows for unobstructed movement Waste properly labeled Incompatible wastes are separated Gondola leaks and dents Lid to gondola secure Accumulation date present Label clearly visible Pad Inspected for Cracks N/A N/A N/A Ordnance collected and containerized Untreated residue collected on pan, cage or separate container	Time of Inspection Telephone dial tone Security signs at entrance Building secure N/A In position Pressure gauge checked Seal in place Access available Aisle space allows for unobstructed movement Waste properly labeled Incompatible wastes are separated Gondola leaks and dents Lid to gondola secure N/A Accumulation date present N/A Accumulation date present N/A Acumulation date process N/A

Figure 5-2.3

Figure 5-2.4 HAZARDOUS STORAGE DAILY INSPECTION RECORD

(Inspection Required – Daily, When in Use)

Location (Circle)		HS-1	ES-2 (8A)	
		ES-3 (CD6A)	BG ASH STORAGE PAD	
Date	Time	Inspector	Inspection	
		-	Inspect containers for leaks, spills. Visually check the	
			HS-1 sump/trench for liquids	
			Inspect containers for leaks, spills. Visually check the	
			HS-1 sump/trench for liquids	Ш
			Inspect containers for leaks, spills. Visually check the	
			HS-1 sump/trench for liquids	Ш
			Inspect containers for leaks, spills. Visually check the	
			HS-1 sump/trench for liquids	
			Inspect containers for leaks, spills. Visually check the	П
			HS-1 sump/trench for liquids	
			Inspect containers for leaks, spills. Visually check the	
			HS-1 sump/trench for liquids	
			Inspect containers for leaks, spills. Visually check the	П
			HS-1 sump/trench for liquids	
			Inspect containers for leaks, spills. Visually check the	
			HS-1 sump/trench for liquids	
			Inspect containers for leaks, spills. Visually check the	
			HS-1 sump/trench for liquids	
			Inspect containers for leaks, spills. Visually check the HS-1 sump/trench for liquids	
			Inspect containers for leaks, spills. Visually check the	
			HS-1 sump/trench for liquids	
			Inspect containers for leaks, spills. Visually check the	
			HS-1 sump/trench for liquids	Ш
			Inspect containers for leaks, spills. Visually check the	
			HS-1 sump/trench for liquids	Ш
			Inspect containers for leaks, spills. Visually check the	
			HS-1 sump/trench for liquids	Ш
			Inspect containers for leaks, spills. Visually check the	
			HS-1 sump/trench for liquids	
			Inspect containers for leaks, spills. Visually check the	
			HS-1 sump/trench for liquids	
			Inspect containers for leaks, spills. Visually check the	
			HS-1 sump/trench for liquids	Ш
			Inspect containers for leaks, spills. Visually check the	
			HS-1 sump/trench for liquids	Ш
			Inspect containers for leaks, spills. Visually check the	
			HS-1 sump/trench for liquids	
			Inspect containers for leaks, spills. Visually check the	
			HS-1 sump/trench for liquids	
			Inspect containers for leaks, spills. Visually check the	П
, –			HS-1 sump/trench for liquids	
	if action is nee	ded		
Comments:				
Corrective Ac	tion:			
Join Colline Ac				

FORM FQA-0303

Figure 5-2.5

WEEKLY HAZARDOUS STORAGE INSPECTION RECORD HS-1											
	Inspector Signature:										
				/			/			/	
	Time:										
	Date:										
Building Operation	Lights										
	Telephone dial tone										
	Security signs at entrance										
	Building secure										
Emergency/Fire	HS-1 Chemical Transfer (8562)										
Equipment	HS-1 Bldg 8567										
Extinguisher #1	HS-1 Bldg 8568										
Extinguisher #2 Extinguisher #3	In position										
	Pressure gauge checked										
	Seal in place										
	Access available										
Emergency Equipment	Absorbent Material (5 bags)										
	Barricade Tape (1 roll)										
	Boots (10 pair)										
	Drum Repair kit (1)										
	Coveralls – Disposable (10 pair)										
	Face Shield (3)			$\vdash \vdash$			$\vdash \vdash$	\vdash	$\vdash \vdash$	\perp	\perp
	Goggles (3 pair)	\vdash	$\vdash \vdash$		 	 	\vdash	\vdash	$\vdash \vdash$	+ $+$ $+$ $+$ $+$ $+$ $+$ $+$ $+$ $+$ $+$ $+$ $+$	1
	Gloves (10 pair)	<u> </u>						\vdash	$\vdash \vdash$	$+$ \vdash	1 1
	Mercury Spill Kit (1)						\sqcup		\sqcup	\perp \sqcup	
*	Neutralizing Media – Acids (1 gal)										
	Neutralizing Media – Bases (1 gal)										
	pH Paper (1)										
	Shovel - Non-Sparking (1)										
Storage Conditions	Aisle space allows for unobstructed movement										
	Incompatible wastes are		$\vdash \equiv$						-		
	separated	닏	\vdash	닏	 	닏	<u> </u>	닏	누는	\perp	1
	Labels clearly visible									$\perp \sqcup$	
	Inspect containers for leaks or deterioration										
	Inspect small container										
	cabinets for leaks			-					+	$+ \vdash$	
Inspect sumps for liquid											
✓ IF OKAY X IF ACTION IS NEEDED											